




# EDGE DRILLING

## RIG 5

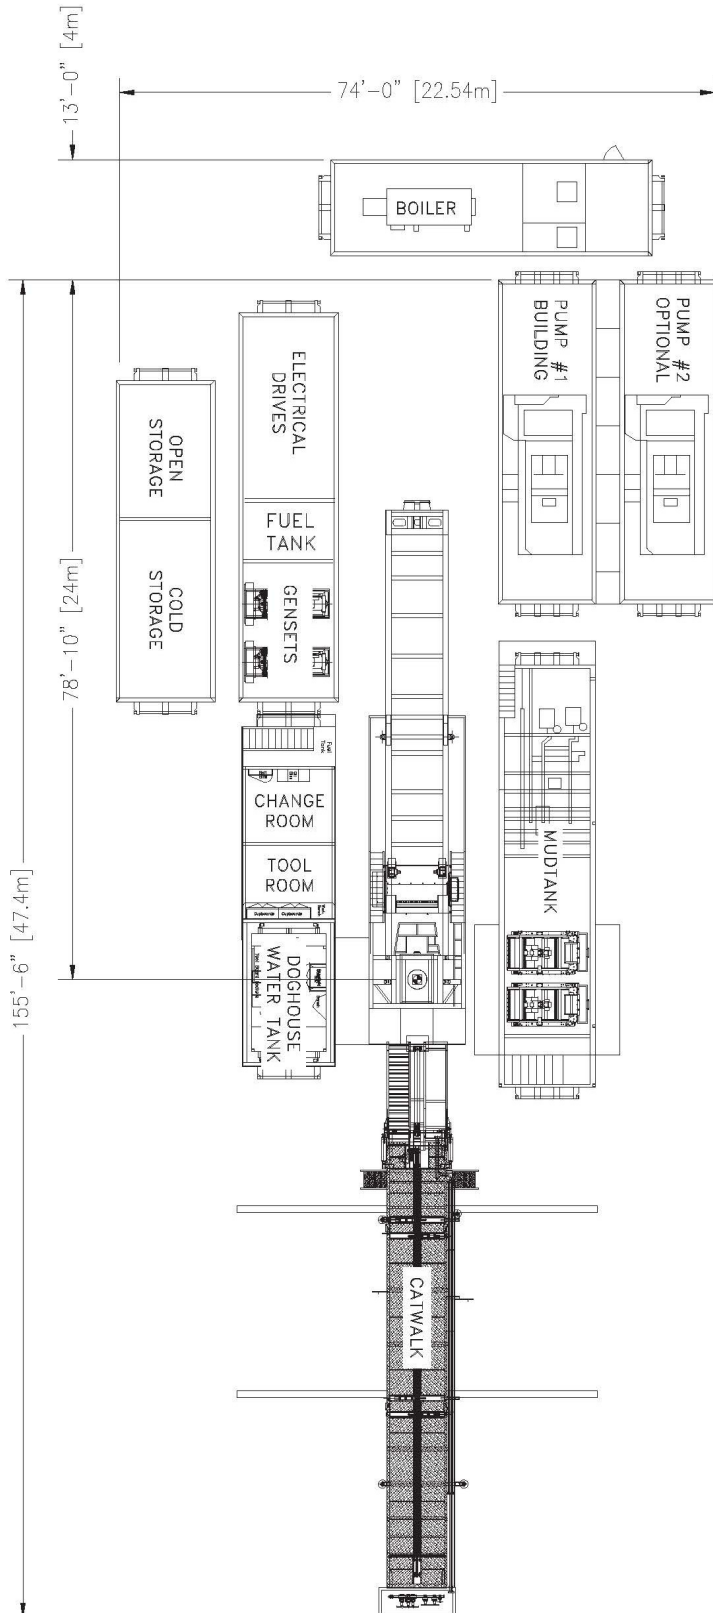

### 3,500m TVD W/ 4" DRILL PIPE STIFF MAST RNG III SINGLE 5,000psi CIRCULATING SYSTEM

#### DRAWWORKS

RIGMASTER E30AC

OEM 600HP AC TRACTION MOTOR

#### MAST

21.95m (72') CLEAR HEIGHT FOREMOST TWIN BOOM RNG III

RATING: 142,300daN (320,000LB) 8 LINES

#### SUBSTRUCTURE

FOREMOST TRAILER ROTARY CAPACITY: 133,440daN (300,000LB)

FLOOR HEIGHT: 4.30m (14'-0")

BOP CLEAR HEIGHT: 3.65m (12'-0")

ROTARY TABLE: ENID 406mm (16") HYDRAULIC

#### OVERHEAD EQUIPMENT

HI QUALITY 160 TON INTEGRATED SPLIT BLOCK

PULL DOWN WINCHES 10,000LBS EACH

#### TOP DRIVE

FOREMOST 150T HYDRAULIC

TORQUE: 23,000FT/LBS LOW GEAR @ 65 RPM

OSCILATING SYSTEM AVAILABLE

#### MUDPUMPS (x2)

(1) MD-9 1000HP w/ 1150HP AC TRACTION MOTOR VFD DRIVE

(2) MD-9 1000HP w/ 1050HP CATERPILLAR C27

#### MUDTANK

TOTAL VOLUME: 65m<sup>3</sup> 4 COMPARTMENTS

2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS

SHAKERS: (2) MI SWACO MONGOOSE

#### B.O.P.'S/MANIFOLD

RATING: 21,000kpa (3,000psi)

50.8mm (2") x 35,000kpa (5,000psi)

MANIFOLD 76.2mm (3") GUTLINE

#### GEN SETS (2)

DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR

455kw 600v 100amp SERVICE

1000HP VFD PUMP DRIVE

600HP VFD DRAWWORKS DRIVE

#### ACCUMULATOR

MANUFACTURER: CONTROL TECHNOLOGY

21,000kpa (3,000psi) 5-FUNCTION, 2-STATION PLC

#### BOILER

MANUFACTURER: SASKATOON 100HP DOUBLE PASS

6,000L (1600GAL) FUEL STORAGE

#### MISC

FUEL CAPACITY: 18,500L (4,900 GALLONS)

WATER TANK CAPACITY: 50m<sup>3</sup> (315BBL)

HYDRAULIC CATWALK W/ POWERED SKATE

#### TUBULARS

AS PER OPERATORS REQUIREMENTS.