


RIG 6

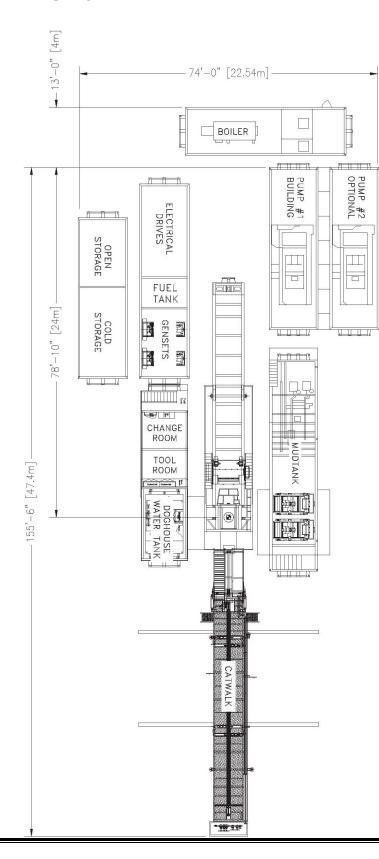

3,500m TVD W/ 4" DRILL PIPE STIFF MAST RNG III SINGLE 5,000psi CIRCULATING SYSTEM

DRAWWORKS

RIGMASTER E30AC
OEM 600HP AC TRACTION MOTOR

MAST

21.95m (72') CLEAR HEIGHT FOREMOST TWIN BOOM RNG III RATING: 142,300daN (320,000LB) 8 LINES

SUBSTRUCTURE

FOREMOST TRAILER ROTARY CAPACITY: 133,440daN (300,000LB)

FLOOR HEIGHT: 4.30m (14'-0") BOP CLEAR HEIGHT: 3.65m (12'-0")

ROTARY TABLE: ENID 406mm (16") HYDRAULIC

OVERHEAD EQUIPMENT

HI QUALITY 160 TON INTEGRATED SPLIT BLOCK PULL DOWN WINCHES 10,000 LBS EACH

TOP DRIVE

FOREMOST 150T HYDRAULIC

TORQUE: 23,000FT/LBS LOW GEAR @ 65 RPM

OSCILATING SYSTEM AVAILALBE

MUDPUMPS (x2)

(1) MD-9 1000HP w/ 1150HP AC TRACTION MOTOR VFD DRIVE

(2) MD-9 1000HP w/ 1050HP CATERPILLAR C27

MUDTANK

TOTAL VOLUME: 65m³ 4 COMPARTMENTS

2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS

SHAKERS: (2) MI SWACO MONGOOSE

B.O.P.'S/MANIFOLD

RATING: 21,000kpa (3,000psi) 50.8mm (2") x 35,000kpa (5,000psi) MANIFOLD 76.2mm (3") GUTLINE

GEN SETS (2)

DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR 455kw 600v 100amp SERVICE 1000HP VFD PUMP DRIVE 600HP VFD DRAWWORKS DRIVE

ACCUMULATOR

MANUFACTURER: CONTROL TECHNOLOGY 21,000kpa (3,000psi) 5-FUNCTION, 2-STATION PLC

BOILER

MANUFACTURER: SASKATOON 100HP DOUBLE PASS 6,000L (1600GAL) FUEL STORAGE

MISC

FUEL CAPACITY: 18,500L (4,900 GALLONS) WATER TANK CAPACITY: 50m³ (315BBL) HYDRAULIC CATWALK W/ POWERED SKATE

TUBULARS

AS PER OPERATORS' REQUIREMENTS.